



Aura Alpinia

The ultimate stairwell LED luminaire range

lighting@demesne.ie

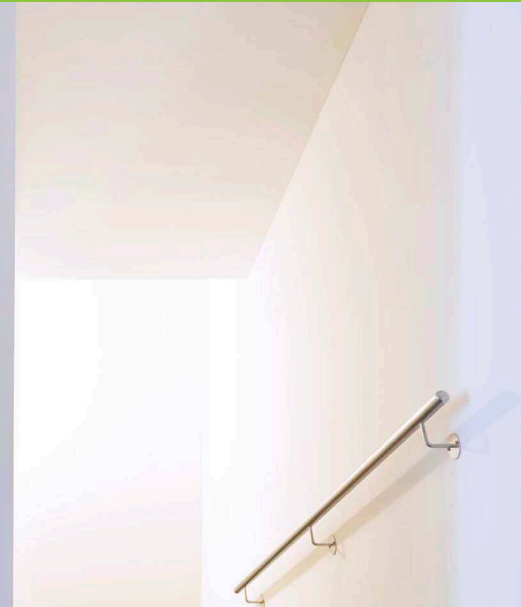

Aura Alpinia luminaire is the perfect solution for wall or ceiling mounting in stairwells. The LED technique makes it possible to ignite fast, regardless of ambient temperature.

The luminaires has a built-in HF sensor and when movement is detected light will come on at full power and stay on during detection plus set time delay. The luminaire is beside stairwells also ideal for offices, corridors and circulation areas. The built in lux control means that the luminaire will not light up at all if there is sufficient daylight in the area already. The luminaire can also be set to on/off function only if this is preferred.

All of the luminaires in the Aura Alpinia range are easy to install, give you all the flexibility you need in terms of settings, and ensure the sense of security that comes with having the right light at the right time.

- Light's up immediately on full effect when movement is detected.
- Comes on at 10, 20 or 30% lo level when the ambient light is below 100 or 200 lux (adjustable) or simply select On/off function only.
- Lux control prevent unwanted operation.
- Battery back up version available, 3h back up power.
- Master and slave version, master can operate up to 5 slaves.
- Built-in hidden HF sensor.
- Easy adjustment of time delay, range, sensitivity, lux, and ground light level.
- Impact-resistant polycarbonate design, IK09 and IP65.
- Modular, LED module can be replaced.
- 5 year guarantee.





APPLICATIONS: Stairwells, corridors, offices and waiting rooms.

MATERIAL: Impact resistant Polycarbonate. IK09 and IP65.

INSTALLATION AND CONNECTION: Surface mounted on wall or ceiling. Studs enable even mounting on un-even surfaces. Cable entry from behind or via the knock-outs on the sides.

COMPONENTS: All components are modular connected with cable harness for easy and quick replacement if required.

TECHNICAL DATA: 220-240V/ AC 50Hz. IK09. IP65. Diameter: 360mm. Battery back-up provides 3 hours of operation during a power failure. CE.

	TYPE	SYSTEM POWER (W)	LUMINOUS FLUX (lm)	LUMINAIRE EFFICACY (lm/W)	WEIGHT (kg)	ARTICLE NO.
MODELS	IQ-4455M Sensor LED lamp master, 3000K	23	1680	73	1,8	465208
	IQ-4455M-4K Sensor LED lamp master, 4000K	23	1750	76	1,8	465211
	IQ-4455MB Sensor LED lamp master with battery, 3000K	23	1680	73	1,9	465210
	IQ-4455MB-4K Sensor LED lamp Master with battery, 4000K	23	1750	76	1,9	465213
	IQ-4455S LED lamp slave, 3000K	23	1680	73	1,7	465209
	IQ-4455S- LED lamp slave, 4000K	23	1750	76	1,7	465212