

ARCA 304015



Sample image

Order symbol : ARCA 304015

Product nr : 8120022

UL Code : UL508A

Description : Cabinet, PC


Remarks : Grey cover, 2-point locking, hinges on the short side

EAN : 6418074079336

El. number :

- Finland : 3423119
- Denmark : 8212091207
- Sweden : 2500111

Including : Cabinet base. door with PUR gasket. mounting plate. screws for mounting plate. 3mm double bit lock(s) with key. S versions with swinghandle 2-point locking system. Door guide included.

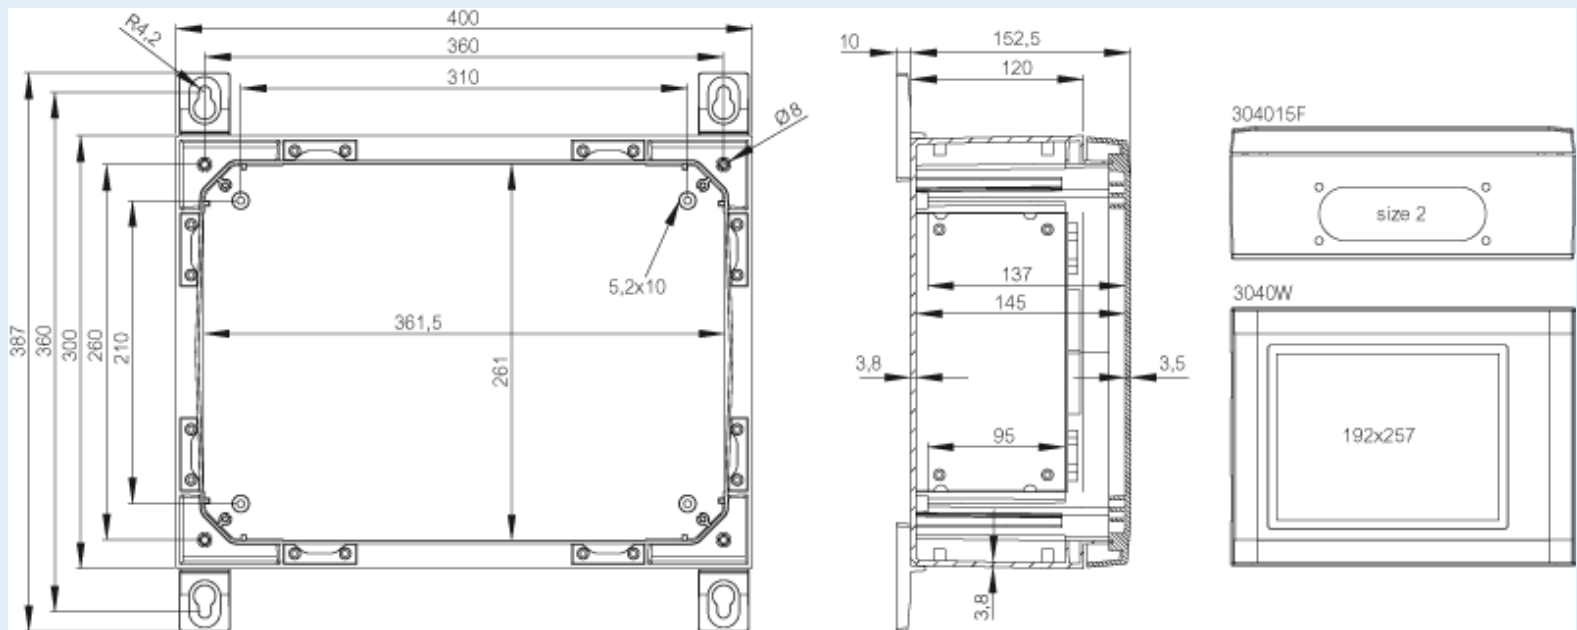

Dimensions :	Height	Width	Depth
mm :	300	400	150
inch :	11.81	15.75	5.91

Materials :

Material : Polycarbonate

Accessories :

DRS ARCA 304015	DIN rail frame set (385 x 285 x 35)
SBK ARCA 30	Support bar kit (235 x 40 x 30)
DSP ARCA HRS	Door stopper ARCA, horizontal, right, small
DSP ARCA HLS	Door stopper ARCA, horizontal, left, small

Base colour :	RAL_7035
Cover colour :	RAL 7035 -light grey
Gasket material :	Polyurethane

Temperatures :

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	-40 ... 80
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

SBK ARCA 40	Support bar kit (340 x 40 x 30)
IDS ARCA 3040	Inner door set
RCS ARCA 3040	Rain canopy set for size 3040
PMK ARCA 40	PoleMounting kit, for pole \varnothing 100-300mm (385 x 285 x 35)
MPP ARCA 3040	Mounting plate perforated (350x250x2 mm - 26x11 mm)
MPMP ARCA 4030	Mounting plate multiperforated (350x250x2 mm - \varnothing 3.6 mm)
MPS ARCA 4030	Mounting plate (350x250x2 mm) (350 x 250 x 2)
MPX ARCA 4030	Mounting plate (350x250 mm) (350 x 250 x 15)

Ratings :

Ingress protection (EN 60529):	IP66;
Impact Resistance (EN 62262):	IK10;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 508
Flammability Rating :	UL 94 5VA
Glow Wire Test (IEC 695-2-1) °C :	960C
NEMA Class	NEMA__1_4_4X_12_13

Certificates :

Certificate FI 40467