

MEGA LED-T5 | LED-M

Weatherproof High-Bay equipped with LED tubes or LED module for mid to high ceiling applications as an alternative to traditional HIDs. It helps you to enhance light quality and drive down maintenance and energy costs. Ensuring you always instant light where and when it is needed. Ready to install: weatherproof fast connector included.

- Warehouses
- Industrial halls
- Manufacturing facilities

- All those high areas with difficult access



650°C IK03 IP66 RoHS



SELV



Electrical Control, Switchgear
& Energy Saving specialists



light evolution

lighting@demesne.ie

MATERIAL

Housing: Glass fibre reinforced polyester (RAL 7035)
 Diffuser: Transparent acrylic (PMMA)
 Gear tray: White laquered steel plate
 Clips: Stainless steel
 Gasket: Polyurethane, poured in one piece
 Fast connector: STUCCHI (3-pole), plug included

MEGA LED-T5 | MEGA LED-M



MOUNTING ACCESSORIES

Stainless steel mounting straps are included.
 The corresponding fixing accessories are supplied with the luminaire.

- Surface mounting with mounting beam
- Pendant mount with hook suspension "Y"

PRODUCT OPTIONS

- Transparent PC diffuser
- Dimmable driver*
- Presence sensor*
- Emergency kit*

ACCESSORIES (must be ordered separately)

- Steel wire 2m with hook and express fastener.

Power supply: 700mA
 Rated voltage: 220-240V
 Frequency: 0-50/60Hz
 Ta: -5° to 40°C

*Please consult availability

LED-SYSTEM & CONTROL GEAR

MEGA LED-T5

LED T5 opal glass tubes included
 50,000h product life [L80]
 4,000°K neutral white
 Ra>80

Electronic LED driver

MEGA LED-M

LED module SAMSUNG
 Mid-power LEDs
 50,000h product life [L70]
 4,000°K neutral white
 Ra>80


Electronic LED driver

TECHNICAL FEATURES

Description	Consumption	Efficiency	Luminous Flux	LOR
MEGA LED-T5				
PMMA 4x1.2	92 W	103 lm/W	9,460 lm	81
PMMA 4x1.2+Reflector	92 W	116 lm/W	10,630 lm	91
PMMA 6x1.2	138 W	102 lm/W	14,020 lm	80
PMMA 6x1.2+Reflector	138 W	108 lm/W	14,890 lm	85
MEGA LED-M				
PMMA 4x1.2	135 W	106 lm/W	14,430 lm	82
PMMA 4x1.2+Reflector	135 W	108 lm/W	14,610 lm	83

Description	Code		Code	L x W x H (mm)	KG	EuroPallet
	Surface	Pendant				



MEGA LED-T5						
MEGA LED-T5 PMMA 4x1.2	10118448	10118033	1	1400x375x165	9.4	10
MEGA LED-T5 PMMA 4x1.2+Reflector	10118449	-	1	1400x375x165	9.4	10
MEGA LED-T5 PMMA 6x1.2	10118450	10118035	1	1400x375x165	9.4	10
MEGA LED-T5 PMMA 6x1.2+Reflector	10118451	10118036	1	1400x375x165	9.4	10
MEGA LED-M						
MEGA LED-M PMMA 4x1.2	10121600	10121599	1	1400x375x165	9.4	10

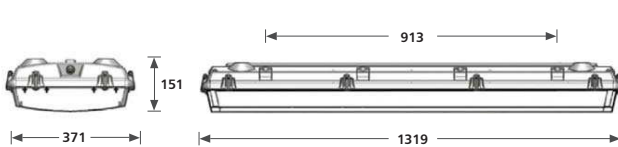

2m steel wire with zinc plated steel snap hook and express fastener made of Zamak

10103049

MEGA LED-T5 6x1.2



MEGA LED-T5 6x1.2+Reflector

